

**DUB-H7**



- 7 Ports For Connecting More Devices to Your Computer
- Works with Both PC & Mac
- Up to 40 Times Faster than USB 1.1
- Backwards Compatible with USB 1.1



## **QuickMedia** USB Solutions *Hi-Speed USB 2.0* **7-Port Hub**

The D-Link QuickMedia DUB-H7 2.0 is a Hi-Speed USB 2.0 7-port hub that is backward compatible with USB 1.0 and 1.1. The DUB-H7 allows connection of up to seven additional USB peripherals or devices to your USB ready PC or Mac.

Designed to provide quick and easy access, the D-Link DUB-H7 provides seven Type A USB downstream ports for connecting USB peripherals, devices, or other USB hubs. A single Type B upstream port connects the DUB-H7 to the host computer or another USB hub, enabling up to 127 devices to be connected by cascading multiple hubs.

Configured directly by the operating system, the D-Link DUB-H7 operates seamlessly with both Microsoft Windows<sup>™</sup> and Apple Macintosh<sup>™</sup> Operating Systems.

Diagnostic LEDs provide port status for each port and power status. The DUB-H7 includes an Installation Guide, a 6-foot Hi-Speed USB 2.0 certified A to B cable, and power adapter.

The DUB-H7 is backward compatible with USB 1.0 and USB 1.1, allowing you to connect all your existing USB peripherals and integrates easily in your existing network at home or in the office.

# QuickMedia USB Solutions

## High-Speed USB 2.0

# 7-Port Hub



**DUB-H7**

### SPECIFICATIONS

#### Standards

- USB Specification Version 2.0
- USB Specification Version 1.1
- USB Specification Version 1.0
- OHCI (Open Host Controller Interface)
- EHCI (Enhanced Host Controller Interface)

#### Operating Systems

- Mac OS X 10.1 and above with USB Support
- Microsoft Windows XP, Me, 2000, 98SE with USB Support

#### Supplied Current

Self-Powered Mode: 500mA per port

#### Ports

- One upstream USB Type B Port
- Seven downstream USB Type A Ports

#### Dimensions

99.6 mm x 59.5 mm x 25.7 mm

#### Connectivity

Up to 127 devices by cascading multiple hubs

#### LEDs

- Self Powered
- Port Status

#### Operating Temperature

0°C to 40°C

#### Storage Temperature

0 to 95%, non-condensing

#### Humidity

5% to 95%, non-condensing

#### Power Requirements

Self Powered 12.6W, 3A@5 VDC

#### Power supply

Output 5V 3A


#### Compliances

CE, FCC Class B, VCCI, UL

#### Warranty


1 Year

Technology

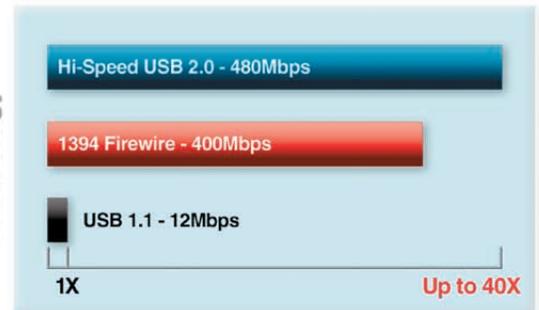

Performance<sup>1</sup>

The DUB-H7 performs up to 40 times faster than USB 1.1 by utilizing the 480Mbps<sup>1</sup> throughput speed of Hi-Speed USB 2.0.

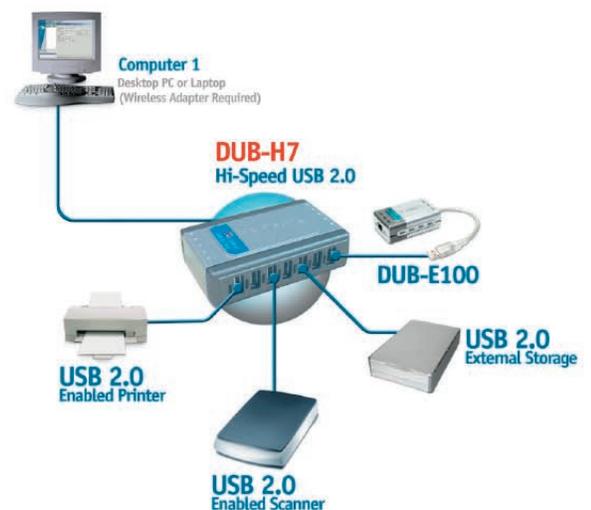

<sup>1</sup> Maximum transfer rate based on USB 2.0 specifications. Actual data throughput will vary.

