



Overview

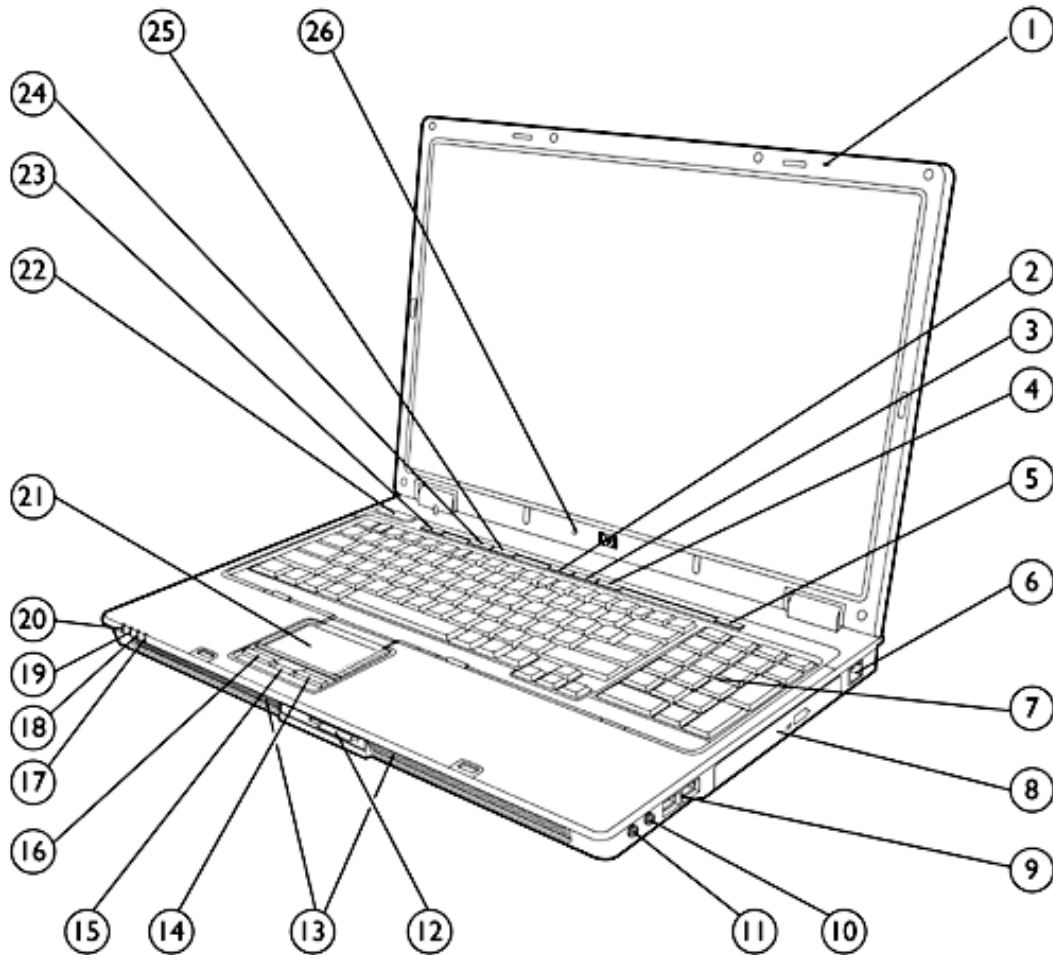

- | | |
|--------------------------------|---|
| 1. Internal Microphone | 14. Right Touchpad Button |
| 2. Volume Mute Button with LED | 15. Optional Biometric Fingerprint Sensor |
| 3. Volume Down Button | 16. Left Touchpad Button |
| 4. Volume Up Button | 17. Hard Drive Activity LED |
| 5. Calculator Launch Button | 18. Battery Charging LED |
| 6. RJ-45 Port (NIC) | 19. Power/Standby LED |
| 7. Integrated Numeric Keypad | 20. Wireless On/Off LED |
| 8. Integrated Optical Drive | 21. Touchpad with scroll zone |
| 9. 2 USB 2.0 Ports | 22. Power Button with LED |
| 10. Microphone Jack | 23. HP Info Center Button |
| 11. Headphone Jack | 24. Wireless On/Off Button with LED |
| 12. 7-in-1 Media Reader | 25. Presentation Mode Button |
| 13. Stereo Speakers | 26. Ambient Light Sensor |

Overview

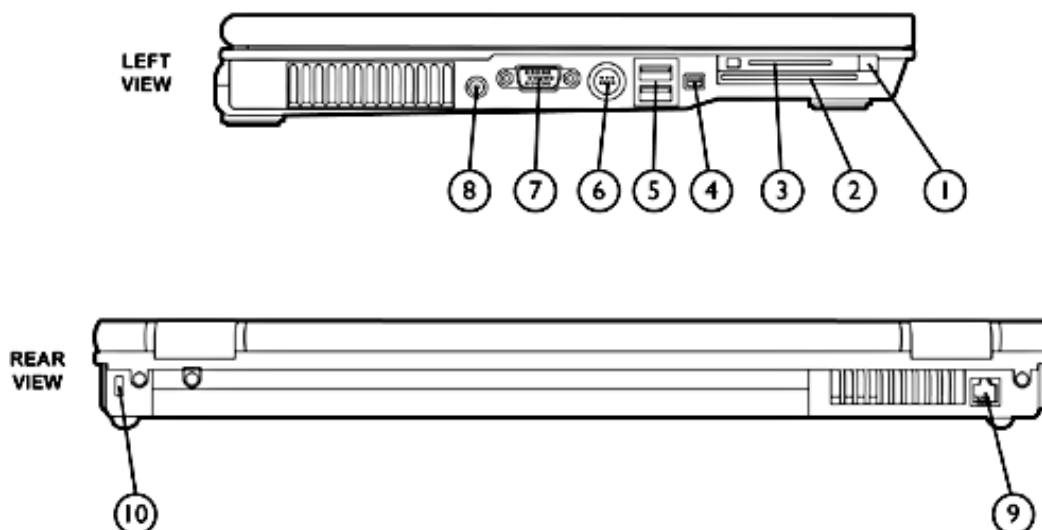

- | | |
|---------------------------------|------------------------------|
| 1. PC Card Eject Button | 6. S-Video TV Out |
| 2. Integrated Smart Card Reader | 7. VGA/External Monitor Port |
| 3. PC Card Slot | 8. Power Connector |
| 4. IEEE 1394 Port | 9. RJ-11 Port (Modem) |
| 5. 2 USB 2.0 Ports | 10. Kensington Lock Slot |

At A Glance

- Genuine Microsoft Windows XP Professional, Genuine Microsoft Windows XP Home Edition, FreeDOS
- Certified for Novell Linux Desktop 9
- Sleek light-weight design starting at 7.4 lb (3.36 kg) and 1.3 inch (33 mm) thin at front
- 17.0-inch wide screen display
- Intel® Core™ Duo processors T2300 to T2600*
- Up to 4GB* of 533- or 667-MHz DDR2 SDRAM, dual channel memory support
- ATI Mobility Radeon X1600 graphics controller with 256 MB of discrete video memory
- Up to 100-GB 7200 rpm, user-removable hard drive
- Optional 802.11 a/b/g or 802.11 b/g wireless LAN modules and optional Bluetooth®
- IEEE 1394 Port
- 7-in-1 Media Reader
- Security features include integrated Smart Card Reader, TPM Embedded Security Chip, and optional Biometric Fingerprint Sensor
- Broadcom NetXtreme Gigabit Ethernet PCI Express Controller
- Protected by a one-year standard parts and labor warranty - certain restrictions and exclusions apply.

* Intel's numbering system is not a measurement of higher performance.

** Above 3-GB, all memory may not be available due to system resource requirements.

Standard Features

Processors

Intel Core Duo processor T2600* (2.16-GHz, 667-MHz FSB, 2-MB L2 cache)

Intel Core Duo processor T2500* (2.00-GHz, 667-MHz FSB, 2-MB L2 cache)

Intel Core Duo processor T2400* (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)

Intel Core Duo processor T2300* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)

* Intel's numbering is not a measurement of higher performance.

NOTE: Processor speed denotes maximum performance mode; processors will run at approximately 1 GHz in battery optimization mode.

Operating System

Preinstalled

Genuine Microsoft Windows XP Professional SP2
Genuine Microsoft Windows XP Home Edition SP2
FreeDOS

Supported

Microsoft Windows 2000 (drivers downloadable from <http://www.hp.com>)

Certified

Novell Linux Desktop 9

Chipset

Mobile Intel 945PM Express Chipset with 667-MHz front side bus

Graphics

ATI Mobility Radeon X1600 graphics controller with 256 MB of discrete video memory

Display

Internal

17.0-inch WXGA+ display with 1440 x 900 resolution and 16M colors
17.0-inch WSXGA+ wide viewing angle display with 1680 x 1050 resolution and 16M colors
17.0-inch WSXGA+ wide viewing angle BrightView display with 1680 x 1050 resolution and 16M colors
17.0-inch WUXGA wide viewing angle display with 1920 x 1200 resolution and 16M colors
Ambient light sensor

External

Up to 32-bit per pixel color depth
VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz
DVI port in optional HP Docking Station (sold separately) supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking
NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Standard Features

Memory	Standard	256-MB, 512-MB, 1024-MB 533-MHz DDR2 SDRAM SODIMMs 256-MB, 512-MB, 1024-MB or 2048-MB 667-MHz DDR2 SDRAM SODIMMs Two SODIMM slots supporting dual channel memory
	Maximum	Upgradeable to 4096-MB maximum (2048-MB SODIMM in slots 1 and 2)
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Above 3-GB, all memory may not be available due to system resource requirements.

Communications	Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC*) with HP Smart Power NIC technology
	56K V.92 modem** with digital line guard
	<p>* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.</p> <p>** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.</p>

Wireless Devices	Support for a broad range of secure, integrated wireless LAN options featuring support for the latest industry standards. Integrated Bluetooth is also an option (factory configurable only) and can be combined with any one of the supported wireless LAN options.	
	All integrated wireless LAN options	Wi-Fi certified Cisco Compatible Extensions support (Version 4.0) Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support WiFi Certified for WPA2, WMM Dual antennas integrated in the display enclosure
	Intel PRO/Wireless 3945ABG Network Connection	Intel Centrino mobile technology Integrated support for 802.11a, b and g Up to 54-mbps data rate
	Intel PRO/Wireless 3945BG Network Connection	Intel Centrino mobile technology Integrated support for 802.11 b and g Up to 54-mbps data rate
	Broadcom 4311AG WiFi Adapter	Integrated support for 802.11a, b and g Up to 54-mbps data rate
	Broadcom 4311BG WiFi Adapter	Integrated support for 802.11 b and g Up to 54-mbps data rate
	HP Integrated Module with Bluetooth 2.0 Wireless Technology	Bluetooth Specification v2.0 compliant Works with a wide range of Bluetooth devices

Standard Features

Keyboard	The 101/102-key compatible keyboard features an industry standard, full-width layout with desktop keyboard features such as isolated inverted-T cursor control keys, left and right control and alt keys, and 12 function keys. Other features include a full numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19.05 mm x 19.05 mm key pitch (center-to-center spacing), 3.0 mm stroke, comfort-dished keycaps, and bright key legends for improved visibility in low light conditions.	
One-Touch Productivity Buttons	Provide one-touch access to the following features: HP Info Center, Wireless On/Off, Presentation Mode, Volume down, Volume up, Volume Mute, and Calculator Launch.	
Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons	
Expansion Card Slots	One Type I/II PC Card slot One Integrated Smart Card Reader	Supports 32-bit CardBus and 16-bit PC Cards Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
Media Slots	7-in-1 Media Reader	Supports SD (Secure Digital), MMC (MultiMedia Card), Memory Stick, Memory Stick Pro, Memory Stick Duo*, Smart Media, xD-Picture card *NOTE: Memory Stick Duo Adapters are required and sold separately. Inserting a Memory Stick Duo Card directly into your notebook could damage the memory card and/or notebook.
Storage	Hard Drives HP Mobile Data Protection System 3D Fixed Optical Drives	60-, 80-, 100-GB 5400 rpm SMART SATA 80-, 100-GB 7200 rpm SMART SATA NOTE: These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 8 GB is reserved for the system recovery software. Hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. DVD-ROM DVD/CD-RW Combo DVD+/-RW SuperMulti with Double Layer LightScribe DVD+/-RW with Double Layer

Standard Features

Interfaces	PC Card Slot	One – Type I/II
	Smart Card Reader	One
	External Monitor	One – VGA
	External Microphone	One
	Headphone/Line out	One
	Power Connector	One
	RJ-11 (Modem)	One
	RJ-45 (NIC)	One
	Ambient Light Sensor	One
	IEEE 1394 Port (4-pin)	One
	S-Video TV Out	One (Support for NTSC/PAL)
	USB 2.0	Four
	Docking Connector	One
	Travel Battery Connector	One
	LED Status Indicators	Twelve

Audio	ADI High Definition CODEC
	Integrated 16-bit Sound Blaster Pro compatible audio
	Integrated stereo speakers
	Integrated directional microphone
	External volume up, volume down, and mute buttons
	Stereo headphone/line out
	Stereo microphone in

Software	Preinstalled Software	Adobe Acrobat Reader
	Microsoft Windows XP	HP Backup and Recovery Manager
		HP Help and Support
		HP Mobile Print Driver
		HP ProtectTools Security Manager:
		BIOS Configuration for HP ProtectTools
		Embedded Security for HP ProtectTools
		Credential Manager for HP ProtectTools
		Smart Card Security for HP ProtectTools
		HP Quick Launch Buttons
		HP Wireless Assistant
		Sonic Digital Media Plus:
		RecordNow! (for optional DVD+/-RW and DVD/CDRW drives)
		MyDVD (DVD Authoring for optional DVD+/-RW drives)
		Synaptics Touchpad Driver
		Symantec Norton Internet Security with complimentary 60-day live update
		Intervideo WinDVD – DVD Player (for optional DVD+/-RW, DVD/CDRW and DVD drives)

Standard Features

HP Backup and Recovery Manager Each unit is shipped with HP Backup and Recovery Manager. HP Backup and Recovery Manager can provide data and system file protection for HP business PCs to enable fast recovery if the system becomes corrupted or if important information is accidentally deleted. HP Backup and Recovery Manager can perform scheduled or manual backups of the entire drive or individual files and folders. Up to 8 GB is reserved for the system recovery software. HP Backup and Recovery Manager can also create software recovery CDs or DVDs (requires optional hardware).

SMBIOS Version 2.4 System Management BIOS, previously known as DMI BIOS, is used to store system management information.

HP ProtectTools Security Manager HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available or planned are:

- Smart Card Security for HP ProtectTools
- BIOS Configuration for HP ProtectTools
- Embedded Security for HP ProtectTools
- Credential Manager for HP ProtectTools

Security	Standard Features	HP ProtectTools Security Manager	
		Configuration Control Hardware	
		Memory Change Alert	
		Ownership Tag	
		Setup Password	
		Power-On Password	
		HP Drivelock	
		TPM Enhanced Drivelock	
		HP Disk Sanitizer	
		Enabled for PC Smart Card	
		Kensington Lock Slot	
		Integrated Smart Card Reader	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
	TPM Embedded Security Chip	Designed to the Trusted Computing Group (TCG) standard Microsoft Crypto API and PKCS#11 software interface support RSA Secured Partner program certification NOTE: Full functionality of the TPM Embedded Security Chip is available only with Windows XP Professional.	
Optional Features	HP Biometric Fingerprint Sensor	Biometric sensor for fingerprint authentication, configurable between Touchpad pick buttons	
For more information on HP security solutions refer to http://www.hp.com/go/security .			

Standard Features

Power Supply	HP 90-watt Smart AC Adapter, 6-foot (1.8-meter) power cord included. Total length including External AC adapter is 12 feet (3.66 meter). HP Fast Charge technology	
Battery	Primary Battery Optional HP 8-Cell Extended Life Battery Optional HP 12-Cell Ultra-Capacity Battery	69Wh 8-cell high capacity Lithium-Ion 52Wh 8-cell high capacity Lithium-Ion 95Wh 12-cell high capacity Lithium-Ion
Battery Life	Primary Battery Primary Battery and optional HP 8-Cell Extended Life Battery Primary Battery and optional HP 12-Cell Ultra-Capacity Battery	Up to 4 hours Up to 7 hours and 30 minutes Up to 10 hours
	NOTE: Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.	
System Standby Time	Up to 1 week	
Power Conservation	Supports enhanced Intel SpeedStep technology with Intel Core Duo processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode) HP Smart Power NIC technology ATI PowerPlay technology Hibernation Standby ACPI compliance	
Docking	HP Docking Station HP Advanced Docking Station HP's shared docking solutions provide simple and convenient port replication and cable management. Features include Gigabit NIC pass through, modem pass through, legacy parallel and serial ports, DVI, S-video TV out, USB 2.0 ports, integrated security mechanism*, integrated MultiBay II and ExpressCard** slots. These docking solutions are compatible across multiple Business Notebook platforms enabling a lower total cost of ownership. * HP/Kensington Cable Lock required (purchased separately) ** HP Advanced Docking Station only	
Service and Support	HP Services includes a one-year standard parts and labor warranty, pick-up or carry-in, and toll-free 7 x 24 hardware technical phone support (depending on model). On-site service and warranty upgrades are also available. NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp .	

Options

Memory	256-MB 533-MHz DDR2 SDRAM	PE830A
	512-MB 533-MHz DDR2 SDRAM	PE831A
	1-GB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM	EM993AA
	1-GB 667-MHz DDR2 SDRAM	EM994AA
	2-GB 667-MHz DDR2 SDRAM	EM995AA
MultiBay II Storage (9.5-mm) NOTE: Requires HP Advanced Docking Station or HP External MultiBay II	8X DVD-ROM MultiBay II Drive	PA849A
	Combo DVD/CD-RW MultiBay II Drive	PA850A
	DVD+/-RW SuperMulti with Double Layer MultiBay II Drive	PA851A
	80-GB 5400 rpm MultiBay II Hard Drive	PH357A
Other Storage	80-GB 5400 rpm Primary SATA Hard Drive	ET354AA
	DVD+/-RW Double Layer Drive with LightScribe Upgrade	ET353AA
	HP USB Digital Drive + 256-MB Secure Digital Card	DL702AA
	HP USB Diskette Drive	DC361B
Communications	Intel PRO/Wireless 3945ABG 802.11 a/b/g WLAN option kit	EX150AA#xxx
Expansion Solutions	HP Docking Station	EN488AA#xxx
	HP Advanced Docking Station	EN489AA#xxx
	HP Monitor Stand	PA507A
	HP Adjustable Notebook Stand	PA508A
	HP External MultiBay II (9.5-mm)	PA509A#xxx
	HP 4-port USB 2.0 Hub	DG954A
Power	HP 2-bay Battery Charging Station	DT533A#xxx
	HP 10-bay Battery Charging Station (North America only)	DT534A#ABA
	Battery Adapter kit #1	PK402A
	90W Smart AC Adapter	ED495AA#xxx
	90W Smart Auto Adapter	ED493AA
	65W Air/Auto/AC Combo Adapter	ED993AA#xxx
	Primary 8-cell Battery Pack	PB992A
	HP 8-cell Extended Life Battery	PB993A
Carrying Cases	HP 12-cell Ultra-Capacity Battery	EJ092AA
Carrying Cases	HP Executive Leather Case	PA847A
	HP Sport Backpack	DG102A

Options

Security	HP/Kensington Cable Lock	PC766A
Input/Output Devices	USB/PS2 Keyboard	DC852A#xxx
	USB/PS2 Optical Mouse	DC369A
	HP USB Optical Travel Mouse	F2100A

Memory

Up to 4096 MB* of 533-MHz or 667-MHz DDR2 SDRAM
Two DIMM slots
DIMM sizes supported: 256 MB, 512 MB, 1024 MB, and 2048 MB

- Standard Memory
- 256 MB (256 MB x 1)
 - 512 MB (512 MB x 1 or 256 MB x 2)
 - 1024 MB (1024 MB x 1 or 512 MB x 2)
 - 2048 MB (1024 MB x 2)
 - 4096 MB* (2048 MB x 2)

Optional Memory Upgrades

Support for up to 4096 MB* of memory is available (with the installation of optional DDR2 SDRAM memory kits). Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
768 MB	512 MB	256 MB
1024 MB	1024 MB	Empty
1024 MB	512 MB	512 MB
1280 MB	1024 MB	256 MB
1536 MB	1024 MB	512 MB
2048 MB	1024 MB	1024 MB
4096 MB*	2048 MB	2048 MB

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Memory Upgrades	256-MB 533-MHz DDR2 SDRAM	PE830A
	512-MB 533-MHz DDR2 SDRAM	PE831A
	1024-MB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM	EM993AA
	1024-MB 667-MHz DDR2 SDRAM	EM994AA
	2048-MB 667-MHz DDR2 SDRAM	EM995AA

* Above 3-GB, all memory may not be available due to system resource requirements.

Storage

Removable Media Drive Support

	Quantity Supported	Drive Bay
LightScribe DVD+/-RW Drive with Double Layer	One	Fixed optical drive bay
DVD+/-RW SuperMulti Drive with Double Layer	One	Fixed optical drive bay
DVD/CD-RW Combo Drive	One	Fixed optical drive bay
DVD-ROM Drive	One	Fixed optical drive bay

Hard Drive Support

	Quantity Supported	Drive Bay
Primary Hard Drives		
100-GB 7200 rpm SMART Hard Drive	One	Dedicated hard drive bay
80-GB 7200 rpm SMART Hard Drive	One	Dedicated hard drive bay
100-GB 5400 rpm SMART Hard Drive	One	Dedicated hard drive bay
80-GB 5400 rpm SMART Hard Drive	One	Dedicated hard drive bay
60-GB 5400 rpm SMART Hard Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	1.3 in (at front) x 15.5 in x 10.8 in (33 mm (at front) x 393 mm x 275 mm)
	Weight	7.4 lb (3.36 kg)
	NOTE: Height varies depending upon where on the notebook the measurement is made. Weight includes 8-cell battery, 60-GB hard drive, 512-MB memory, 802.11 wireless communications module, and TPM Embedded Security Chip. Weight varies by configuration and components.	
Stand-Alone Power Requirements	Nominal Operating Voltage	19 V
	Average Operating Power	25 W
	Max Operating Power	< 90 W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	Blue Angel	No
	UL	Yes
	Energy Star Compliant	Yes
	CSA	Yes
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	Croatian Compliance (CIT)	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes

Technical Specifications

HP 90W Smart AC Adapter	Dimensions	5.24 x 2.28 x 1.1 in (13.3 x 5.8 x 2.9 cm)	
	Weight	0.86 lb (390 g)	
	Input	100 to 240 VAC	
	Input Efficiency	83% min at 115 VAC	
	Input frequency range	47 to 63 Hz	
	Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version	
		2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version	
	Output	Output power 65W	90W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
Optional HP 12-Cell Ultra-Capacity Battery		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC950, EN60950, UL1950, Class2, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCIB, NOM-1 NYCE; MTBF– over 200,000 hours at 25°C ambient condition.	
	Option Kit Contents	90W AC Adapter, power cable, warranty booklet	
	Dimensions (H x W x L)	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)	
	Weight	1.77 lb (0.803 kg)	
	Cells/Type	12-cell Lithium-Ion	
	Energy	Voltage	14.4V
		Watt-hour Capacity	95Wh
		Amp-hour Capacity	6.6Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	Smart Adapter	3 to 4 hours
		System ON	4 to 5 hours (depending on system power consumption)
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	

Technical Specifications

Optional HP 8-Cell Extended Life Battery	Dimensions (H x W x L)	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)	
	Weight	1.00 lb (0.455 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Voltage	14.4V
		Watt-hour Capacity	52Wh
		Amp-hour Capacity	3.6Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	3 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 1.5 hours when system is OFF
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	

69Wh Primary 8-Cell Battery	Dimensions (H x W x L)	0.8 x 1.9 x 10.6 in (2.0 x 4.8 x 27.0 cm)	
	Weight	0.980 lb (0.445 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Voltage	14.4V
		Watt-hour Capacity	69Wh
		Amp-hour Capacity	4.8Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 1.5 hours when system is OFF

Technical Specifications

17.0-Inch Color TFT WXGA+ Display	Active Area (W x H)	14.5 x 9.0 in (36.7 x 22.9 cm)	
	Diagonal Size	17.0 in (431.8 mm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 typical	
	Refresh Rate	60 Hz	
	Brightness	150 nit typical	
	Pixel Resolution	Pitch	0.255 mm
		Format	1440 x 900
		Configuration	RGB Stripe
	Backlight	CCFL	
	PPI	100	
	Viewing Angle	±45° Horizontal, ±25° Vertical (typical)	

17.0-Inch Color TFT WSXGA+ Wide Viewing Angle Display	Active Area (W x H)	14.5 x 9.0 in (36.7 x 22.9 cm)	
	Diagonal Size	17.0 in (43.2 cm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 typical	
	Refresh Rate	60 Hz	
	Brightness	170 nit typical	
	Pixel Resolution	Pitch	0.219 mm
		Format	1680 x 1050
		Configuration	RGB Stripe
	Backlight	CCFL	
	PPI	116	
	Viewing Angle	±75° Horizontal, ±60° Vertical (typical)	

17.0-Inch Color TFT WSXGA+ Wide Viewing Angle BrightView Display	Active Area (W x H)	14.5 x 9.0 in (36.7 x 22.9 cm)	
	Diagonal Size	17.0 in (43.2 cm)	
	Surface Treatment	BrightView	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 typical	
	Refresh Rate	60 Hz	
	Brightness	170 nit typical	
	Pixel Resolution	Pitch	0.219 mm
		Format	1680 x 1050
		Configuration	RGB Stripe
	Backlight	CCFL	
	PPI	116	
	Viewing Angle	±70° Horizontal, ±60° Vertical (typical)	

Technical Specifications

17.0-Inch Color TFT WUXGA Wide Viewing Angle Display	Active Area (W x H)	14.5 x 9.0 in (36.7 x 22.9 cm)	
	Diagonal Size	17.0 in (43.2 cm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 typical	
	Refresh Rate	60 Hz	
	Brightness	170 nit typical	
	Pixel Resolution	Pitch	0.191 mm
		Format	1920 x 1200
		Configuration	RGB Stripe
	Backlight	CCFL	
	PPI	133	
	Viewing Angle	±70° Horizontal, ±60° Vertical (typical)	

Hard Drives

100-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	100 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	195,371,568	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

80-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

100-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	100 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	195,371,568	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

80-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

60-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	60 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	117,231,408	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Removable Storage Drives – Fixed Bay

DVD-ROM Drive	Access Times	Random	<116 ms CD
			<125 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X-DVD	10,800 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	None	
	Max Media Capacity (read)	4.7 GB	
	Transport	Tray Loading	

Technical Specifications

DVD/CD-RW Combo Drive	Access Times	Random	<110 ms CD <130 ms DVD
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 24X CD-RW	3,600 KB/s 10,800 KB/s 3,600 KB/s 3,600 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	700 MB	
	Transport	Tray loading	

LightScribe DVD+/-RW Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 10X CD-RW 8X DVD+R 4X DVD+RW 8X DVD-R 4X DVD-RW 2.4X DVD+R(9)	3,600 KB/s 10,800 KB/s 3,600 KB/s 1,500 KB/s 10,800 KB/s 5,400 KB/s 10,800 KB/s 5,400 KB/s 2,700 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, LightScribe	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Technical Specifications

DVD+/-RW SuperMulti Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 10X CD-RW 8X DVD+R 4X DVD+RW 8X DVD-R 4X DVD-RW 2.4X DVD+R(9) 5X DVD-RAM	3,600 KB/s 10,800 KB/s 3,600 KB/s 1,500 KB/s 10,800 KB/s 5,400 KB/s 10,800 KB/s 5,400 KB/s 2,700 KB/s 6,750 KB/s
	Transfer Mode	Multiword DMA Mode	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

HP Biometric Fingerprint Sensor	Mobile Voltage Operation	3.0V–3.6V Single Supply	
	Operating Temperature	32° – 158°F (0° – 70°C)	
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management	
	High-Rate Image Capture	Up to 240 image frames /sec	
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)	
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images	

Audio

Hardware	Implementation	ADI1981HD High Definition CODEC
	Volume Controls	Up, down, and mute buttons
	Full Duplex	Yes
	Sound Blaster Pro compatible	Yes
	Microphone Jack	Stereo or mono
	Headphone/Line Out Jack	Stereo

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Internal Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (BCM5753M)	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
		100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
		1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)
		Auto-Negotiation (Automatic Speed Selection)
		Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
		IEEE 802.1p QoS (Quality of Service) Support
	Power Management	IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
		ACPI compliant -- multiple power modes
		Situation-sensitive features reduce power consumption
	Performance Features	NIC Battery Saving Mode (enabled by default)
		TCP/IP/UDP Checksum Offload (configurable)
		TCP Segmentation Offload
		CPU Task Offload
		Adaptive Interrupts

Technical Specifications

	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Cable Analyzer
	Interface	PCI Express x1
	NIC Device Driver Name	Broadcom NetXtreme Gigabit Ethernet
	Drivers Available	Microsoft Windows XP Microsoft Windows 2000
V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
	Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2

Technical Specifications

	Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251
Broadcom 4311AG 802.11a/b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CCK)²	17.5 dBm
	Output Power (for OFDM; power varies by data rate)²	15 dBm
	Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode ³ : 390 mW (nominal) Sleep mode: 20 mW (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm, 1 Mbps: -97 dBm
	Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
	Range	802.11 a – Typical (@6 Mbps) 600 feet – Outdoor Open Area 150 feet – Indoor, Office environment

Technical Specifications

	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants. 	

Broadcom 4311BG 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK

Technical Specifications

Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CKK) ²	17.5 dBm	
Output Power (for OFDM; 15 dBm power varies by data rate) ²		
Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode ³ : 390 mW (nominal) Sleep mode: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants. 	

Intel PRO/Wireless
3945ABG 802.11a/b/g
Network Connection

Wireless LAN Standards IEEE 802.11a
IEEE 802.11b
IEEE 802.11g

Technical Specifications

Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)	
Frequency Band	2.4 GHz and 5 GHz	
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM	
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP- MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK)²	15 dBm	
Output Power (for OFDM; power varies by data rate)²	15 dBm	
Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode ³ : 150 mW (nominal) Sleep mode: 30 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps) 802.11 b – Typical (@1 Mbps) 802.11 g – Typical (@1 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment 1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment 1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating Non-operating	32° to 176° F (0° to 80° C) -40° to 176° F (-40° to 80° C)
Humidity	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)

Technical Specifications

Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Choice of Configuration Utility:	
	<ul style="list-style-type: none">• Microsoft Windows XP Wireless Network Connection Manager• Intel PROSet (required for Cisco Compatible Extensions support)	

LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON
<ol style="list-style-type: none">1. Check latest software/driver release for updates on supported security features.2. Maximum output power may vary by country according to local regulations.3. In Power Save Polling mode.4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.	

Intel PRO/Wireless 3945BG 802.11b/g Network Connection	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CKK) ²	15 dBm
	Output Power (for OFDM; power varies by data rate) ²	15 dBm
	Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode ³ : 150 mW (nominal) Sleep mode: 30 mW (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity ⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm

Technical Specifications

Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 b – Typical	1200 feet – Outdoor Open Area
	(@1 Mbps)	300 feet – Indoor, Office environment
	802.11 g – Typical	1200 feet – Outdoor Open Area
	(@1 Mbps)	300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet (required for Cisco Compatible Extensions support) 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants. 	

HP Integrated Module with Bluetooth Wireless Technology

Bluetooth Specification	2.0 Compliant
Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 264 mW
	Peak (Rx) 231 mW
	Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant

Technical Specifications

OS Support	Microsoft Windows Plug and Play compliant Microsoft Windows XP Professional and Home Microsoft Windows 2000
Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows XP Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% Non-operating 5% to 95%
Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software) Serial Port Profile (SPP)* Dial-Up Networking (DUN)* Generic Object Exchange Profile (GOEP) Object Push Profile (OPP)* File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP)* Personal Area Networking Profile (PAN)* Human Interface Device Profile (HID)* FAX Profile (FAX) Basic Imaging Profile (BIP) Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

* indicates the profile is also supported by Microsoft Windows XP SP2

Environmental Data

Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: <ul style="list-style-type: none">• US Energy Star• US Federal Energy Management Program (FEMP)• IT ECO declaration
---	--



Technical Specifications

Batteries

- Taiwan Green-Mark
- China Energy Conversation Program

This product complies with ISO standards:

EU Directive 91/ 157/ EEC
EU Directive 93/ 86/ EEC
EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

Mercury greater than 5ppm by weight
Cadmium greater than 10ppm by weight
Lead greater than 4000 ppm by weight.
Primary Battery size: 8-cell
Primary Battery type: Lithium-Ion

Real Time Clock Battery size: [TBD]

Real Time Clock Battery type: [TBD]

Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains TBD% recycled materials (by wt.)

Material Usage

This product is TBD% recycle-able when properly disposed of at end of life.

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)

Technical Specifications

Packaging

- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2006 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core Duo, Centrino, and SpeedStep are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.